

HuddleCamHD

12X Optical Zoom

USB 3.0 + DVI-I

Conferencing Camera

The HuddleCamHD range is compatible with the following Conferencing Software:

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- Blue Jeans
- Cisco Jabber
- Cisco WebEX
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- VSee
- Zoom.US

Summary of Features

- 12X Optical Zoom
- 1920 x 1080p Resolution
- 70° Field of View
- Up to 60 fps
- USB 3.0 & DVI-I
- RS-232: Yes, In and Out
- 64 Presets
- Certified SONY Lens

HuddleCamHD



1080p USB 3.0 & DVI-I Conferencing Camera with 12X Optical Zoom for medium to large sized rooms

The HuddleCamHD 12X offers USB 3.0 and DVI-I which are simultaneous outputs.

Meaning you can stream to the cloud using GoToMeeting, WebEX, Skype, Google Hangouts, Zoom.US or Cisco Jabber and use a traditional video conferencing codec, monitor or other recording device at the same time.

Specifications

Camera & Lens	
Video CMOS Sensor	1/2.8 CMOS 2.0 Megapixel Sensor
Video Signal:	1080p 60/50/30/25 1080i 60/50 720p 60/50/30/25
Lens zoom	12X Optical Zoom
Field of View	70°
Minimum Illumination	1.0 at F1.2
White Balance	Auto/Manual
Focus	Auto/Manual
Iris	Auto/Manual
Shutter Speed:	Auto/Manual

Specifications cont...

Pan/Tilt Movement

Pan Movement	±170°
Tilt Rotation	-30 ° ~ -90°
Built in Pan/Tilt Motor	Pan Speed: 1-200°/Second Tilt speed: 1-150°/Second
Preset Speed	Pan running: 120°/sec Tilt running: 100°/sec
Preset:	64 preset position 4 Patrol lines

Rear board Connectors

High Definition Interface	USB 3.0 & DVI-I
Controller Signal Interface	8 leads mini DIN (VISCA IN/RS485)
Controller Signal Interface	Dip-switch Pin 7/TTL Signal
Baud Ratio	9600 bps
Power supply interface	DC 12V 2A

Electrical Index

Power supply adapter	12V DC 2.5A
Input voltage	12V DC(10.5-14V DC)
Input power	24W (MAX)

Physical


Material	Aluminium, Plastic
Dimension (W x H x D)	265.17 x 171.45 x 147.57mm NET
Working environment	Indoor
Temperature	-0°to +45°
Storage temperature:	-10° to +60°
Colour:	Silver Grey

Ordering Details

Part No	Description
HC HUD-HD12X	HuddlecamHD 12X USB PTZ Camera

What's in the Box

12X Zoom USB 3.0 HD Video Conference Camera
12V DC 2.5A Power Adaptor
DVI-HDMI Adaptor
USB 3.0 A-B Cable (2m)
RS-232 Cable
IR Remote Controller
User Manual

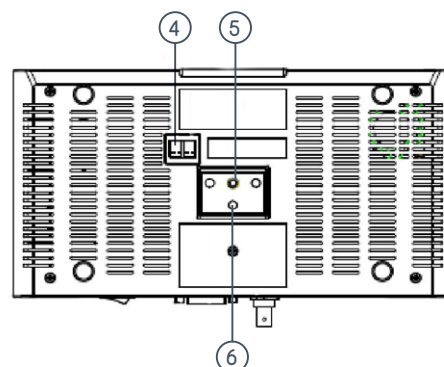

- Lens**
12X Optical Zoom.
- Camera Base**
Base of the camera.
- IR Receiver**
To receive IR remote controller signal.
- Dip Switches**
For putting camera in setup modes.
- Tripod Screw Hole**
Will accept 1/4-20 bolt from 3rd party tripod, wall or ceiling mount.
- Additional Mounting Holes**
Will accept 1/4-20 bolt from 3rd party tripod, wall or ceiling mount.
- System Select**
For selecting output resolution.
- VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- USB 3.0 B Male Interface**
For connection to PC USB 3.0 port (NOT compatible with USB 2.0 port or driver).
- DVI-I Video Output**
Provides simultaneous digital or analogue video output to monitor.
- 12VDC Input Power Supply Jack**
Only use the Power Adaptor supplied with this camera.
- Power Indicator Light**
Red LED illuminates when unit is powered.